



FIRELINE OR DOMESTIC CONNECTION WITH MAIN EXTENSION

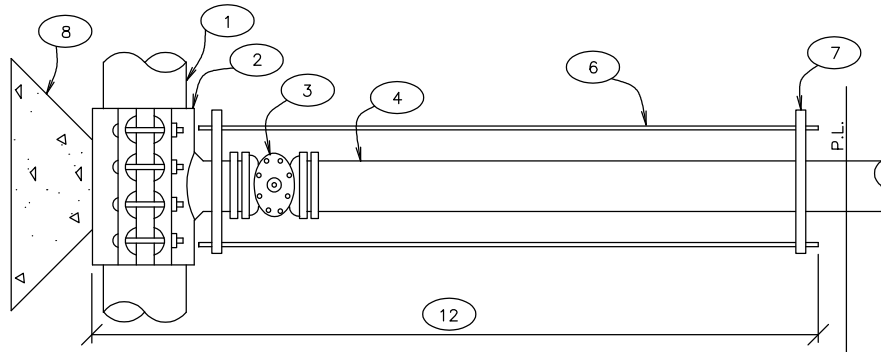

FIRELINE OR DOMESTIC CONNECTION

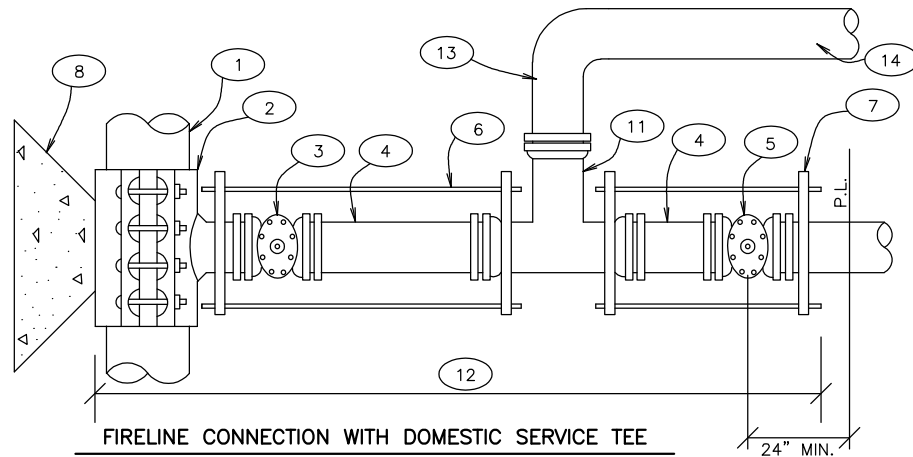

FIRELINE CONNECTION WITH DOMESTIC SERVICE TEE

NOTE: 4" FIRELINE CONNECTION WITH 1-1/2" OR 2" DOMESTIC TEE SHALL BE PLUGGED AND TAPPED WITH AWWA CC THREADS FOR APPLICABLE SIZE.

- | | | | |
|---|--|----|--|
| 1 | EXISTING MAIN | 8 | CONCRETE KICKBLOCK |
| 2 | TAPPING SLEEVE | 9 | M.J. ANCHORING TEE (SWIVEL TEE WHERE APPLICABLE) |
| 3 | TAPPING VALVE | 10 | M.J. VALVE |
| 4 | DOUBLE SPIGOT PIPE | 11 | DOMESTIC SERVICE TEE OR SERVICE TAP |
| 5 | PROPERTY LINE VALVE | 12 | POLYETHYLENE WRAPPED |
| 6 | TIE RODS (MEGALUGS ARE NOT ACCEPTABLE) | 13 | 90° FITTING (BEND FOR 2" & SMALLER) |
| 7 | PIPE CLAMP | 14 | VALVE OR CURBSTOP AS NOTED ON PLANS & CONTINUE PER APPLICABLE METER DETAIL |



**STANDARDS &
SPECIFICATIONS**

REVISED:

**2" AND LARGER
FIRELINE
CONNECTION**

DATE:

DRAWING NO. 200-17